

25D Series

产品简介

压敏电阻的本身是由氧化锌颗粒组成的矩阵结构。颗粒之间的晶界类似双向 PN 结的电气特性，当低电压时，这些晶界处于高阻抗状态，当电压高时，又会处于击穿状态，是一种非线性器件。



Product Profile

The body of varistor is a matrix structure composed of zinc oxide particles. The grain boundaries between particles are similar to the electrical characteristics of bidirectional PN junctions. When the voltage is low, these grain boundaries are in the high impedance state, and when the voltage is high, they will be in the breakdown state, which is a kind of non-linear device

应用领域:

通讯基站电源

铁路信号电源

1000V 以下低压配电设备、控制设备等等。

楼宇配电

电焊机

Application

Communication base station power supply


Railway signal power supply

1000V the following low voltage distribution equipment, control equipment and so on.

Distribution of buildings

Welding machine

产品料号代码 HOW TO ORDER

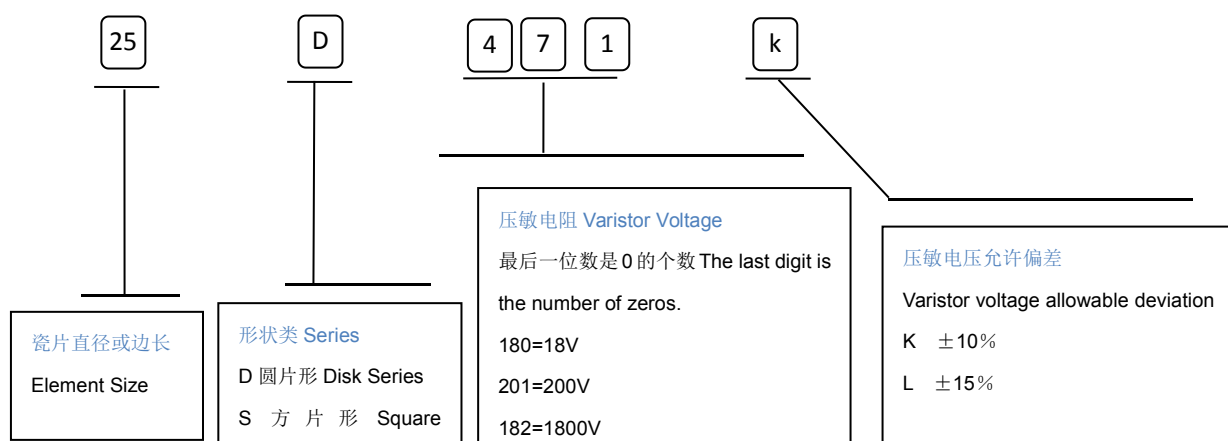

按冲击 8/20 μ s 浪涌电流分类 Classification According to 8/20 μ s Surge Current

一、普通型、KJ 加强型

型号 Part NO.	压敏电压	最大允许 使用电压	K 普通型			KJ 加强型		
	V1mA (V)	AC (V)	I _{max} (8/20 μ s) (A)	I _n (15 次) (8/20 μ s) (A)	能量 (10/1000 μ s) (J)	I _{max} (8/20 μ s) (A)	I _n (15 次) (8/20 μ s) (A)	能量 (10/1000 μ s) (J)
5D	82-750	50-400	400	150	2.5-18	800	250	3.5-33
7D	82-820	50-400	1200	500	6.0-43	1750	1000	8.4-7.1
10D	82-1800	50-1000	2500	1500	13-185	3500	1500	18-259
14D	82-1800	50-1000	4500	3000	26-378	6000	3000	31-450
20D	82-1800	50-1000	6500	3000	48-632	10000	5000	67-850
5D	18-68	11-40	100		0.5-2.1	250	150	0.7-2.9
7D	18-68	11-40	250		1.3-5.0	500	250	1.8-7.0
10D	18-68	11-40	500		2.8-11	1000	500	3.9-15
14D	18-68	11-40	1000		5.7-21	2000	1000	6.8-25
20D	18-68	11-40	2000		11-46	3000	1000	13-55
符合国际及国家标准			IEC61051-1	GB/T10193	包含左栏，并增加以下标准： IEC60950-1: 2013/Annex Q GB/4943.1-2011 GB8898-2011 UL1449			
			IEC61051-2	GB/T10194				
			IEC61051-2-2	GBT10195				
			CSA-C22.2	No.269.5-17				
			UL1449					

二、KH 加强型(整机标准)

1.符合整机标准：IEC61000-4-5,GB/T17626.5《电磁兼容试验和测量技术浪涌（冲击）抗扰度试验》，在使用 AC 电压的 4 个相位角，每个相位角正负个冲击 5 次，总计 40 次冲击；

2.冲击峰值

5D:1KV/0.5KA 7D:2KV/1KA

10D:4KV/2KA 14D:6KV/3KA

20D:10KV/5KA

3.电压规格：V1mA $\geq$ 430V，也即 431 及以上规格；

4.组合波：开路为电压波 1.2/50 μ s，短路为电流波 8/20 μ s，叠加 AC 电压

三、KX 定制型

1.雷击要求高于 KH 级，比如

A.一次冲击的峰值（I_{max}）要求高于 KH,举例：14D 产品，要求 I_{max} $\geq$ 10KA

B.浪涌冲击次数（I_n）要求冲击次数多，举例：14D 产品，要求 6KV/3KA 组合波冲击 100 次、500 次.....

2.小型化要求：10D 替代 14D,14D 替代 20D，20D 替代 32D.....适合 SPD 产品应用

25D 系列 电气参数 25D Series Electrical Parameters


型号规格 Part NO.	压敏电压 Varistor Voltage		最大允许使用电压 Maximum allowable voltage		最大限制电压 Maximum Limited Voltage	通流容量 Withstanding Surge current (8/20μs) times		静态功率 Rated Wattage	能量耐量 Energy (2ms)	静态电容量 (参考值) Typical Capacitance
	1mA	AC	DC	V150A	I max	In	(W)	(J)	1KHz	
	(V)		(V)		(V)	(KA)				(PF)
25D201K	200	185-225	130	170	340	20	10	1.0	125	2.4K
25D221K	220	198-242	140	180	360	20	10	1.0	130	2.2k
25D241K	240	216-264	150	200	395	20	10	1.0	145	2.0K
25D271K	270	243-297	175	225	455	20	10	1.0	170	1.7K
25D301K	300	270-330	190	250	500	20	10	1.0	180	1.6K
25D331K	330	297-363	210	275	550	20	10	1.0	185	1.5K
25D361K	360	324-396	230	300	595	20	10	1.0	190	1.4K
25D391K	390	351-429	250	320	650	20	10	1.0	210	1.2K
25D431K	430	387-473	275	350	710	20	10	1.0	225	1.1K
25D471K	470	423-517	300	385	775	20	10	1.0	225	1.05K
25D511K	510	459-561	320	415	845	20	10	1.0	230	1.0K
25D561K	560	504-616	350	460	925	20	10	1.0	230	0.95K
25D621K	620	558-682	385	505	1025	20	10	1.0	230	0.90K
25D681K	680	612-748	420	560	1120	20	10	1.0	250	0.85K
25D821K	820	738-902	510	670	1355	20	10	1.0	300	0.70K
25D911K	910	819-1001	550	745	1500	20	10	1.0	340	0.65K
25D102K	1.0K	900-1000	625	825	1650	20	10	1.0	375	0.60K
25D122K	1.2K	1080-1320	750	980	1980	20	10	1.0	400	0.55K
25D152K	1.4K	1150-1650	900	1220	2475	20	10	1.0	500	0.52K
25D182K	1.8K	1620-1980	1000	1465	2970	20	10	1.0	700	0.45K

注：压敏电压测试电流 DC1Ma 工作环境温度：-45℃~+85℃ 加强型温度：-45℃~+125℃压敏电压温度变化率：<0.05/℃

Note: Voltage-sensitive voltage test current DC1Ma working environment temperature: - 45 ~85, intensified temperature: - 45 +125, temperature change rate of voltage-sensitive voltage: < 0.05/

产品尺寸

单位 (UNIT) :mm

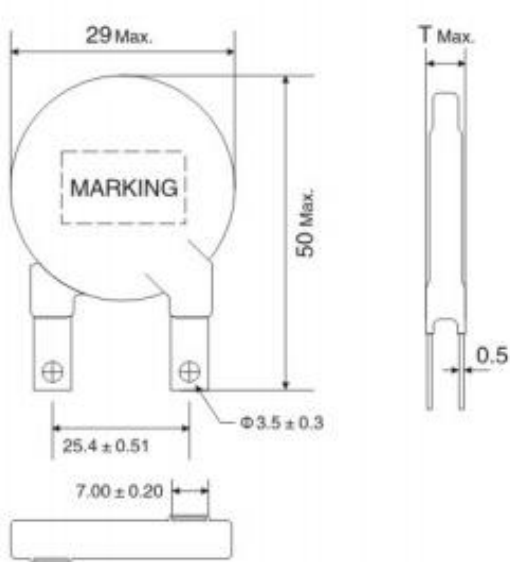产品外形 Product shape	系列 Series	压敏电压 Varistor voltage	厚度 T max
	25D	201-271	7.5
		301-621	9.2
		681-911	11.2
		102-122	12.8
		142-182	16

Disclaimer

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.