


PPTC SMD1206L Series Surface-mount Devices

Features:

- RoHS Compliant & Halogen Free
- Faster tripping, 1206 Dimension, Surface mountable, Solid state
- Maximum Voltage: 6/12Vdc
- Operating Current: 1.5A~7.5A,
- Operating Temperature: -40℃~85℃

Product Dimensions

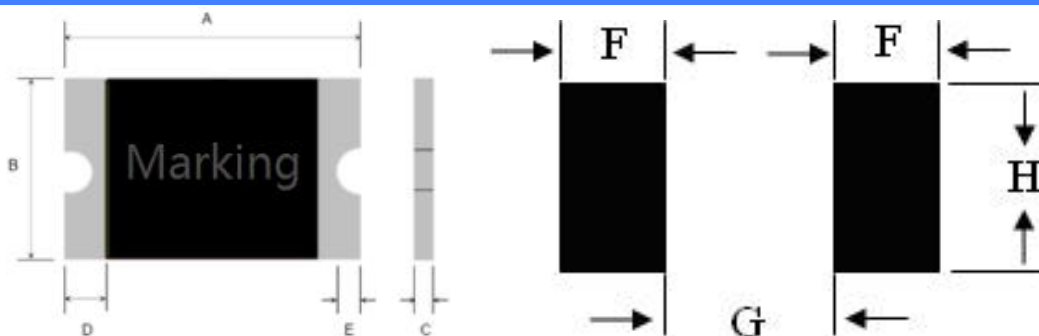

Unit : mm

Model	Dimensions (mm)							
	A(min)	A(max)	B(min)	B(max)	C(min)	C(max)	D(min)	E(min)
SMD1206L-150-6V	3.00	3.50	1.50	1.80	0.30	0.70	0.15	0.10
SMD1206L-150-12V	3.00	3.50	1.50	1.80	0.30	0.70	0.15	0.10
SMD1206L-175-6V	3.00	3.50	1.50	1.80	0.30	0.70	0.15	0.10
SMD1206L-175-12V	3.00	3.50	1.50	1.80	0.30	0.70	0.15	0.10
SMD1206L-200-6V	3.00	3.50	1.50	1.80	0.30	0.70	0.15	0.10
SMD1206L-200-12V	3.00	3.50	1.50	1.80	0.30	0.70	0.15	0.10
SMD1206L-260-6V	3.00	3.50	1.50	1.80	0.40	1.00	0.15	0.10
SMD1206L-260-12V	3.00	3.50	1.50	1.80	0.40	1.00	0.15	0.10
SMD1206L-300-6V	3.00	3.50	1.50	1.80	0.40	1.20	0.15	0.10
SMD1206L-300-12V	3.00	3.50	1.50	1.80	0.40	1.20	0.15	0.10
SMD1206L-350-6V	3.00	3.50	1.50	1.80	0.40	1.20	0.15	0.10
SMD1206L-350-12V	3.00	3.50	1.50	1.80	0.40	1.20	0.15	0.10
SMD1206L-380-6V	3.00	3.50	1.50	1.80	0.40	1.20	0.15	0.10
SMD1206L-380-12V	3.00	3.50	1.50	1.80	0.40	1.20	0.15	0.10
SMD1206L-400-6V	3.00	3.50	1.50	1.80	0.50	1.20	0.15	0.10
SMD1206L-400-12V	3.00	3.50	1.50	1.80	0.50	1.20	0.15	0.10
SMD1206L-450-6V	3.00	3.50	1.50	1.80	0.50	1.40	0.15	0.10
SMD1206L-450-12V	3.00	3.50	1.50	1.80	0.50	1.40	0.15	0.10
SMD1206L-500-6V	3.00	3.50	1.50	1.80	0.50	1.40	0.15	0.10
SMD1206L-500-12V	3.00	3.50	1.50	1.80	0.50	1.40	0.15	0.10
SMD1206L-550-6V	3.00	3.50	1.50	1.80	0.60	1.60	0.15	0.10
SMD1206L-550-12V	3.00	3.50	1.50	1.80	0.60	1.60	0.15	0.10
SMD1206L-600-6V	3.00	3.50	1.50	1.80	0.60	1.60	0.15	0.10



SMD1206L-600-12V	3.00	3.50	1.50	1.80	0.60	1.60	0.15	0.10
SMD1206L-650-6V	3.00	3.50	1.50	1.80	0.60	1.60	0.15	0.10
SMD1206L-650-12V	3.00	3.50	1.50	1.80	0.60	1.60	0.15	0.10
SMD1206L-700-6V	3.00	3.50	1.50	1.80	0.60	1.60	0.15	0.10
SMD1206L-700-12V	3.00	3.50	1.50	1.80	0.60	1.60	0.15	0.10
SMD1206L-750-6V	3.00	3.50	1.50	1.80	0.60	1.60	0.15	0.10
SMD1206L-750-12V	3.00	3.50	1.50	1.80	0.60	1.60	0.15	0.10

Recommended Solder Pad Layout Dimensions (mm)

Device	F	G	H
	Normal Value	Normal Value	Normal Value
1206L Series	1	2	2

Thermal Derating Chart-IH (A)

Model	Maximum ambient operating temperatures (℃)								
	-40	-20	0	25	40	50	60	70	85
SMD1206L-150-6V	2.01	1.77	1.62	1.50	1.22	1.12	1.04	0.87	0.61
SMD1206L-150-12V	2.01	1.77	1.62	1.50	1.22	1.12	1.04	0.87	0.61
SMD1206L-175-6V	2.34	2.05	1.89	1.75	1.44	1.31	1.20	1.00	0.72
SMD1206L-175-12V	2.34	2.05	1.89	1.75	1.44	1.31	1.20	1.00	0.72
SMD1206L-200-6V	2.68	2.33	2.15	2.00	1.66	1.49	1.37	1.15	0.80
SMD1206L-200-12V	2.68	2.33	2.15	2.00	1.66	1.49	1.37	1.15	0.80
SMD1206L-260-6V	3.49	3.05	2.82	2.60	2.15	1.93	1.78	1.49	1.04
SMD1206L-260-12V	3.49	3.05	2.82	2.60	2.15	1.93	1.78	1.49	1.04
SMD1206L-300-6V	4.03	3.51	3.26	3.00	2.49	2.23	2.06	1.71	1.20
SMD1206L-300-12V	4.03	3.51	3.26	3.00	2.49	2.23	2.06	1.71	1.20
SMD1206L-350-6V	4.70	4.10	3.80	3.50	2.90	2.60	2.40	2.00	1.40
SMD1206L-350-12V	4.70	4.10	3.80	3.50	2.90	2.60	2.40	2.00	1.40
SMD1206L-380-6V	6.40	4.85	4.25	3.80	3.20	2.80	2.49	2.05	1.43
SMD1206L-380-12V	6.40	4.85	4.25	3.80	3.20	2.80	2.49	2.05	1.43
SMD1206L-400-6V	6.74	5.11	4.47	4.00	3.37	2.95	2.62	2.16	1.51
SMD1206L-400-12V	6.74	5.11	4.47	4.00	3.37	2.95	2.62	2.16	1.51
SMD1206L-450-6V	6.85	5.92	5.47	4.50	3.73	3.34	3.00	2.35	1.55
SMD1206L-450-12V	6.85	5.92	5.47	4.50	3.73	3.34	3.00	2.35	1.55
SMD1206L-500-6V	7.30	6.34	5.66	5.00	4.42	3.85	3.47	3.12	2.38
SMD1206L-500-12V	7.30	6.34	5.66	5.00	4.42	3.85	3.47	3.12	2.38
SMD1206L-550-6V	8.03	6.97	6.32	5.50	4.86	4.24	3.82	3.43	2.62
SMD1206L-550-12V	8.03	6.97	6.32	5.50	4.86	4.24	3.82	3.43	2.62
SMD1206L-600-6V	8.46	7.60	6.75	6.00	5.15	4.25	4.00	3.44	2.86
SMD1206L-600-12V	8.46	7.60	6.75	6.00	5.15	4.25	4.00	3.44	2.86



SMD1206L-650-6V	9.17	8.23	7.31	6.50	5.58	4.60	4.33	3.73	3.10
SMD1206L-650-12V	9.17	8.23	7.31	6.50	5.58	4.60	4.33	3.73	3.10
SMD1206L-700-6V	9.87	8.87	7.88	7.00	6.01	4.96	4.67	4.01	3.34
SMD1206L-700-12V	9.87	8.87	7.88	7.00	6.01	4.96	4.67	4.01	3.34
SMD1206L-750-6V	10.58	9.50	8.44	7.50	6.44	5.31	5.00	4.30	3.58
SMD1206L-750-12V	10.58	9.50	8.44	7.50	6.44	5.31	5.00	4.30	3.58

Electrical Characteristic

Model	V _{max}	I _{max}	I _{hold}	I _{trip}	P _D	Maximum Time to Trip		Resistance (Ω)	
	(Vdc)	(A)	(A)	(A)	(W)	Current (A)	Time (S)	Rmin	Rmax
SMD1206L-150-6V	6.0	50.0	1.5	3.0	0.8	8.0	5.0	0.01	0.065
SMD1206L-150-12V	12.0	50.0	1.5	3.0	0.8	8.0	5.0	0.01	0.065
SMD1206L-175-6V	6.0	50.0	1.75	3.5	0.8	8.0	5.0	0.01	0.06
SMD1206L-175-12V	12.0	50.0	1.75	3.5	0.8	8.0	5.0	0.01	0.06
SMD1206L-200-6V	6.0	50.0	2.0	4.0	0.8	8.0	5.0	0.008	0.04
SMD1206L-200-12V	12.0	50.0	2.0	4.0	0.8	8.0	5.0	0.008	0.04
SMD1206L-260-6V	6.0	50.0	2.6	5.2	0.8	8.0	5.0	0.004	0.026
SMD1206L-260-12V	12.0	50.0	2.6	5.2	0.8	8.0	5.0	0.004	0.026
SMD1206L-300-6V	6.0	50.0	3.0	6.0	0.8	15.0	2.0	0.004	0.02
SMD1206L-300-12V	12.0	50.0	3.0	6.0	0.8	15.0	2.0	0.004	0.02
SMD1206L-350-6V	6.0	50.0	3.5	7.0	1.0	17.5	2.0	0.004	0.018
SMD1206L-350-12V	12.0	50.0	3.5	7.0	1.0	17.5	2.0	0.004	0.018
SMD1206L-380-6V	6.0	50.0	3.8	7.6	1.0	19.0	2.0	0.004	0.016
SMD1206L-380-12V	12.0	50.0	3.8	7.6	1.0	19.0	2.0	0.004	0.016
SMD1206L-400-6V	6.0	50.0	4.0	8.0	1.0	20.0	2.0	0.004	0.014
SMD1206L-400-12V	12.0	50.0	4.0	8.0	1.0	20.0	2.0	0.004	0.014
SMD1206L-450-6V	6.0	50.0	4.5	9.0	1.0	22.5	2.0	0.002	0.012
SMD1206L-450-12V	12.0	50.0	4.5	9.0	1.0	22.5	2.0	0.002	0.012
SMD1206L-500-6V	6.0	50.0	5.0	10.0	1.0	25.0	2.0	0.002	0.011
SMD1206L-500-12V	12.0	50.0	5.0	10.0	1.0	25.0	2.0	0.002	0.011
SMD1206L-550-6V	6.0	50.0	5.5	11.0	1.2	27.5	2.0	0.002	0.010
SMD1206L-550-12V	12.0	50.0	5.5	11.0	1.2	27.5	2.0	0.002	0.010
SMD1206L-600-6V	6.0	50.0	6.0	12.0	1.2	30.0	2.0	0.002	0.009
SMD1206L-600-12V	12.0	50.0	6.0	12.0	1.2	30.0	2.0	0.002	0.009
SMD1206L-650-6V	6.0	50.0	6.5	13.0	1.2	32.5	2.0	0.001	0.009
SMD1206L-650-12V	12.0	50.0	6.5	13.0	1.2	32.5	2.0	0.001	0.009
SMD1206L-700-6V	6.0	50.0	7.0	14.0	1.2	35.0	2.0	0.001	0.008
SMD1206L-700-12V	12.0	50.0	7.0	14.0	1.2	35.0	2.0	0.001	0.008
SMD1206L-750-6V	6.0	50.0	7.5	15.0	1.2	37.5	2.0	0.001	0.007
SMD1206L-750-12V	12.0	50.0	7.5	15.0	1.2	37.5	2.0	0.001	0.007

Test Procedures And Requirements

Test	Test Conditions	Accept/Reject Criteria
Resistance	In still air at 25°C	$R_{min} \leq R \leq R_{1max}$
Time to Trip	Specified current, V_{max} , 25°C	$T \leq T_{Maximum}$ Time to Trip
Hold Current	30min, at I_H , 25°C	No trip
Trip Cycle Life	V_{max} , I_{max} , 100 cycles	No arcing or burning
Trip Endurance	V_{max} , 1 hour	No arcing or burning


Physical Characteristics

Terminal Materials	Tin-Plated Nickle-copper
Soldering Zone	Meets EIA specification RS 186-9E and ANSI/J-STD-002 Category 3.
Moisture Sensitivity	Level 2a, per IPC/JEDEC J-STD 020C

Physical Characteristics and Environmental Specifications

Test Item	Test Conditions	Resistance Change
Passive Aging	85°C, 1000 hours	±10% typical
Humidity Aging	85°C/85%RH. 100 hours	±5% typical
Thermal Shock	MIL-STD-202, Method 107G +85°C/-40°C, 20 times	-30% typical
Solvent Resistance	MIL-STD-202, Method 215	No change
Vibration	ML-STD-883C, Test Condition A	No change

Solder Reflow Conditions

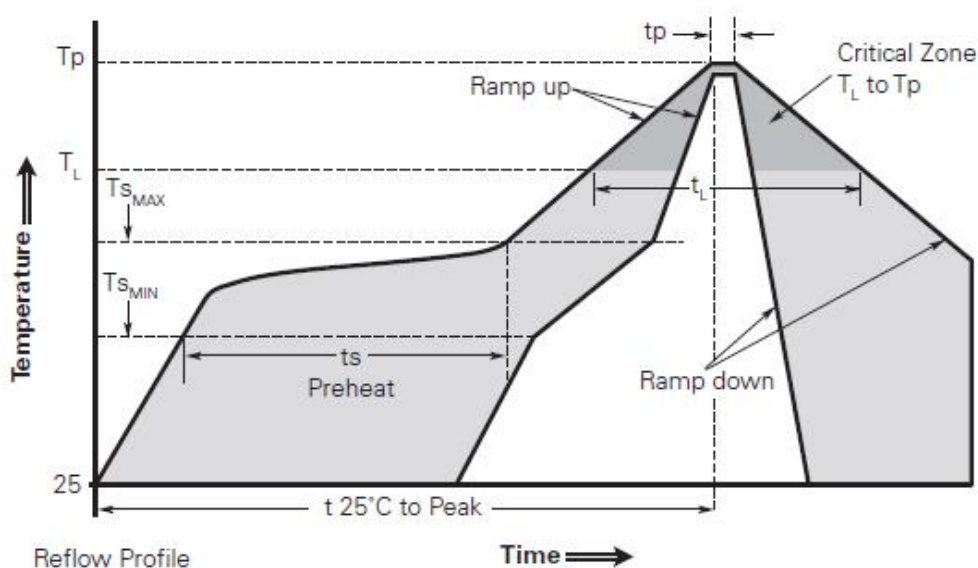

Profile Feature

- Average ramp up rate($T_{S_{MAX}}$ to T_P)

Preheat

- Temperature min ($T_{S_{MIN}}$)
- Temperature max ($T_{S_{MAX}}$)
- Time($T_{S_{MIN}}$ to $T_{S_{MAX}}$)

Time maintained above:

- Temperature(T_L)
- Time(T_L)
- Peak/Classification temperature(T_P)

Time within 5°C of actual peak temperature

- Time(T_P)
- Ramp down rate
- Time 25°C to peak temperature

Note: All temperatures refer topside of the package.measured on The package body surface

Notes: If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements

Pb-Free Assembly

$3^{\circ}\text{C}/\text{Second}$ max

150°C

200°C

60-120 Seconds

217°C

60-150 Seconds

260°C

30 Seconds max

$3^{\circ}\text{C}/\text{Second}$ max

8 minutes max

- Recommended reflow methods: IR, vapor phase oven, hot air oven, N2 environment for lead-free.

- Devices are not designed to be wave soldered to the bottom side of the board.



- Recommended maximum paste thickness is 0.25mm (0.010inch).

- Devices can be cleaned using standard industry methods and solvents.

- Soldering temprature profile meets RoHs leadfree process.

Tape Specifications and Reel Dimensions

Covering Specifications EIA 481-1	
W	8.00 ± 0.30
P0	4.0 ± 0.10
P1	4.0 ± 0.10
P2	2.0 ± 0.05
A0	1.65 ± 0.10
B0	2.35 ± 0.10
D0	1.55 ± 0.05
F	3.50 ± 0.05
E1	1.75 ± 0.10
T	0.20 ± 0.10
Leader min.	390
Trailer min.	160
Reel Dimensions	
A	178 ± 1.0
N	59 ± 1
W1	$8.5 \pm 1.0 / -0.2$
W2	12.0 ± 1

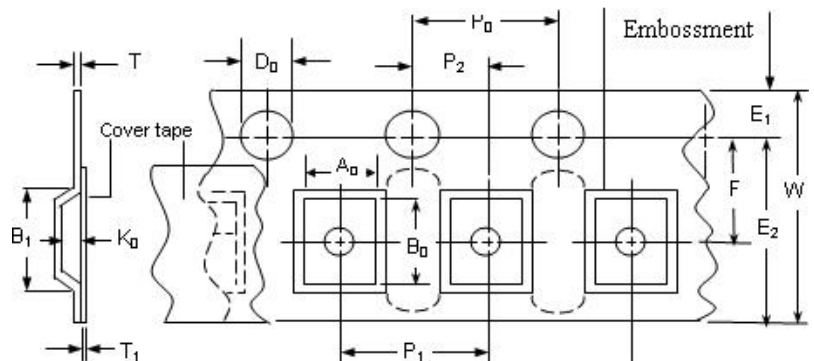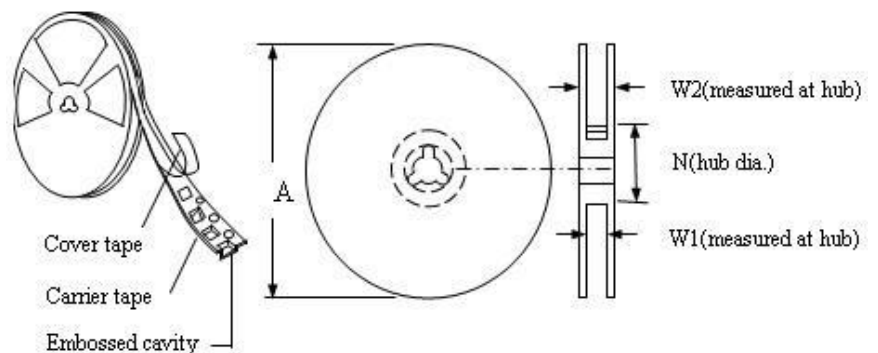EIA Tape Component Dimentionions

EIA Reel Dimentionions


Electrical Specifications:

I_H =Hold current:maximum current at which the device will not trip at 25°C still air.

I_T =Trip current:minimum current at which the device will trip at 25°C still air.

V_{max} =Maximum voltage device can withstand without damage at rated current.

I_{max} =Maximum fault current device can withstand without damage at rated voltage.

T_{trip} =Maximum time to trip(s) at assigned current.

P_d =Typical power dissipation:typical amount of power dissipated by the device when in state air environment.

R_{min} =Minimum device resistance at 25°C prior to tripping.

R_{max} =Maximum device resistance at 25°C prior to tripping.

Warning:

PPTC devices are intended for protection against occasional over-current or over-temperature fault conditions, and should not be used when repeated fault conditions are anticipated. Operation beyond maximum ratings of improper use may result in device damage and possible electrical arcing and flame.

Notes:

The specification is intended to present application, product and technical data to assist the user in selecting PPTC circuit protection devices. However, users should independently evaluate and test the suitability of each product. YINT makes no warranties as to the accuracy or completeness of the information and disclaims any liability resulting from its use. YINT's only obligations are those in the YINT Standard Terms and Conditions of Sale and in no case will YINT be liable for any incidental, indirect, or consequential damages arising from the sale, resale, or misuse of its products. YINT reserves the right to change or update, without notice, any information contained in this specification.